


## ProCurve Radio Port 230

The ProCurve Radio Port 230, with simultaneous 802.11a and 802.11g wireless operation, works in conjunction with the ProCurve Wireless Edge Services xl Module to deliver advanced wireless services. These services enable a highly secure and resilient wireless LAN that dynamically adapts to the demands of a mobile, multi-service network.



ProCurve Radio Port 230 (J9006A)

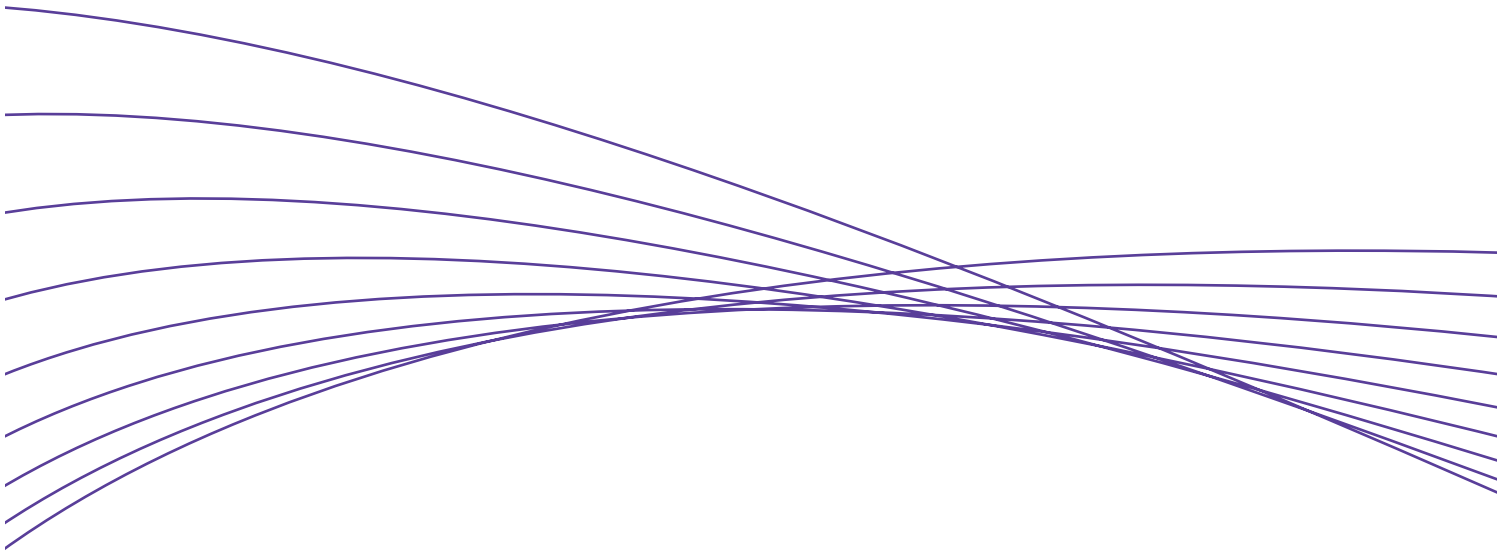

# ProCurve Radio Port 230

## Features and benefits

### Resiliency and high availability

- **Network self-healing:** In the event of a radio port failure, adjacent ProCurve radio ports adjust transmit power and data rates to maintain wireless LAN coverage.
- **RF detection and interference avoidance:** ProCurve radio ports automatically recalibrate channel assignments to avoid environmental or other 802.11-based wireless interference.

### Security

- **Choice of IEEE 802.11i, Wi-Fi Protected Access 2 (WPA2), or WPA:** locks out unauthorized wireless access by authenticating users prior to granting network access; robust Advanced Encryption Standard (AES) or Temporal Key Integrity Protocol (TKIP) encryption secures the data integrity of the wireless traffic
- **IEEE 802.1X:** provides port-based user authentication with support for Extensible Authentication Protocol (EAP), TLS, TTLS, PEAP, and SIM, with choice of AES, TKIP, and static or dynamic WEP encryption for protecting wireless traffic between authenticated clients and the access point
- **4 BSSIDs/16 SSIDs per radio:** Multiple wireless broadcast domains with separate security, authentication, and policy configuration per SSID provide access control of network resources based on user authentication and level of trusted security between the wireless user and the network.
- **RADIUS-based MAC authentication:** a wireless client is authenticated with a RADIUS server based on the MAC address of the client; this is useful for clients that have minimal or no user interface
- **Neighbor access point (rogue AP) detection:** Each ProCurve radio port simultaneously scans for the presence of other access points while servicing wireless clients. Radio ports can be configured as dedicated RF monitors for continuous monitoring of the RF environment.
- **Inter-station traffic blocking:** prevents communication between client devices associated on the same radio port

- **Closed system:** restricts broadcast of SSID as a security measure to conceal presence of the wireless network

### Connectivity

- **Simultaneous 802.11a and 802.11g radio operation:** supports dual-band wireless clients and provides backward compatibility for 802.11b wireless devices
- **Per-radio integrated diversity antenna with omnidirectional coverage:** provides robust, dual-radio wireless LAN coverage for open office environments
- **IEEE 802.11h International Telecommunication Union (ITU) compliant:** Dynamic Frequency Selection (DFS) and Transmit Power Control (TCP) are employed to automatically select another channel and adjust transmit power to minimize interference with systems such as radar, if detected on the same channel.
- **International country configuration:** Centrally configured on the ProCurve Wireless Edge Services xl Module, all ProCurve radio ports automatically adjust to match selected country regulatory requirements.
- **Auto Channel Select (ACS):** helps minimize radio co-channel interference by automatically selecting an unoccupied radio channel
- **Adjustable output power:** controls cell size for high-density access point deployments

### Voice over WLAN ready

- **Wi-Fi WMM support:** provides Quality of Service (QoS) functionality in wireless networks by prioritizing wireless traffic from different applications
- **SpectraLink voice priority (SVP) support:** prioritizes SpectraLink voice IP packets sent from a SpectraLink NetLink SVP server to SpectraLink wireless voice handsets to help ensure excellent voice quality
- **Fast, secure roaming:** enables seamless, fast roaming with pre-cached authentication credentials for wireless users

### Industry certifications

- Visit [www.procurve.com](http://www.procurve.com) for an up-to-date list of industry certifications.

# ProCurve Radio Port 230

## Services

- 3-year, 4-hour onsite, 13x5 coverage for hardware (UD542E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware (UD543E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UD544E)

Check [www.hp.com/go/procurveservices](http://www.hp.com/go/procurveservices) for part numbers and service-level descriptions. For details about services and response times in your area, please contact your local HP sales office.



## Specifications

### ProCurve Radio Port 230

<b>Ports</b>	1 10/100 port (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX)								
<b>Physical characteristics</b>									
Dimensions (D x W x H)	17.53 x 24.89 x 4.24 cm (6.9 x 9.8 x 1.67 in.)								
Weight	0.59 kg (1.3 lb.)								
<b>Mounting</b>	Ceiling mount to suspended ceiling T-bar or wall mount								
<b>Environment</b>									
Operating temperature	0°C to 40°C (32°F to 104°F)								
Operating relative humidity	5% to 95%, non-condensing								
Non-operating/Storage temperature	-40°C to 70°C (-40°F to 158°F)								
Non-operating/Storage relative humidity	5% to 95%, non-condensing								
Altitude	Up to 3 km (10,000 ft.)								
<b>Electrical characteristics</b>									
Voltage	48 Vdc (PoE)								
Maximum heat dissipation	24 BTU/hr								
Current	0.148 A								
Power consumption	7 W								
<b>Safety</b>	UL 60950-1; CAN/CSA 22.2 No. 60950-1; IEC 60950-1; EN 60950-1								
<b>Emissions</b>	EN 60601-1-2; EN 301 489-1; EN 301 489-17; FCC Part 15.107; FCC Part 15.109; ICES-003 (Canada)								
<b>RF exposure</b>	FCC Bulletin OET-65C; IEEE C95.1; RSS-102								
<b>Radio</b>	FCC Part 15.247; FCC Part 15.407 (US); RSS-210 (Canada); EN 300 328; EN 301 893 (Europe); ARIB STD-T66; ARIB STD-T71; ARIB STD-33								
<b>Radio characteristics: IEEE 802.11b</b>									
Data rate	11 Mbps	5.5 Mbps	2 Mbps	1 Mbps					
Receiver sensitivity	-84 dBm	-87 dBm	-88 dBm	-90 dBm					
Transmit power	17.5 dBm	17.5 dBm	17.5 dBm	17.5 dBm					
<b>Radio characteristics: IEEE 802.11g</b>									
Data rate	54 Mbps	48 Mbps	36 Mbps	24 Mbps	18 Mbps	12 Mbps	9 Mbps	6 Mbps	
Receiver sensitivity	-68 dBm	-70 dBm	-75 dBm	-79 dBm	-81 dBm	-85 dBm	-87 dBm	-88 dBm	
Transmit power	12.5 dBm	12.5 dBm	14 dBm	14 dBm	16.5 dBm	16.5 dBm	17 dBm	17 dBm	
<b>Radio characteristics: IEEE 802.11a</b>									
Data rate	54 Mbps	48 Mbps	36 Mbps	24 Mbps	18 Mbps	12 Mbps	9 Mbps	6 Mbps	
Receiver sensitivity	-68 dBm	-70 dBm	-75 dBm	-79 dBm	-81 dBm	-85 dBm	-87 dBm	-88 dBm	
Transmit power	12 dBm	12 dBm	14 dBm	14 dBm	16 dBm	16 dBm	17.5 dBm	17.5 dBm	
<b>Frequency band and operating channels</b>									
FCC (US & Canada)	2.412–2.462 GHz (11 channels)			5.150–5.350 GHz (8 channels)			5.725–5.825 GHz (4 channels)		
European Union	2.412–2.472 GHz (13 channels)			5.150–5.350 GHz (8 channels)			5.470–5.725 GHz (11 channels)		
Japan	2.412–2.484 GHz (14 channels)			5.150–5.350 GHz (8 channels)					
China	2.412–2.472 GHz (13 channels)			5.725–5.825 GHz (4 channels)					
Singapore	2.412–2.472 GHz (13 channels)			5.150–5.350 GHz (8 channels)			5.725–5.825 GHz (4 channels)		
Taiwan	2.412–2.462 GHz (11 channels)			5.250–5.350 GHz (4 channels)			5.725–5.825 GHz (4 channels)		

**For more information**

To learn more about ProCurve  
Networking, please visit  
**[www.hp.com/eur/procurve](http://www.hp.com/eur/procurve)**

© 2006 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

4AA0-5020EEE, 05/2006

